
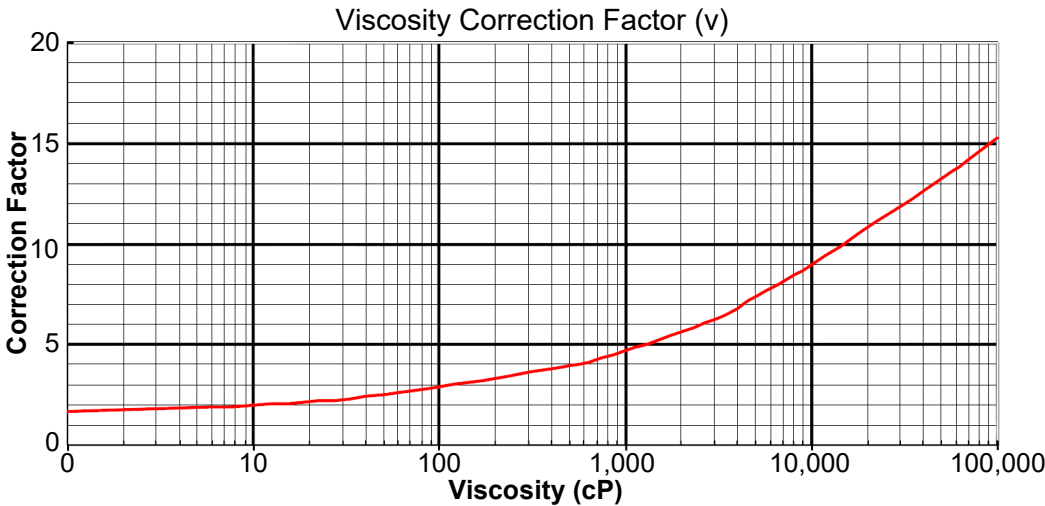


AL Series Positive Displacement Pumps

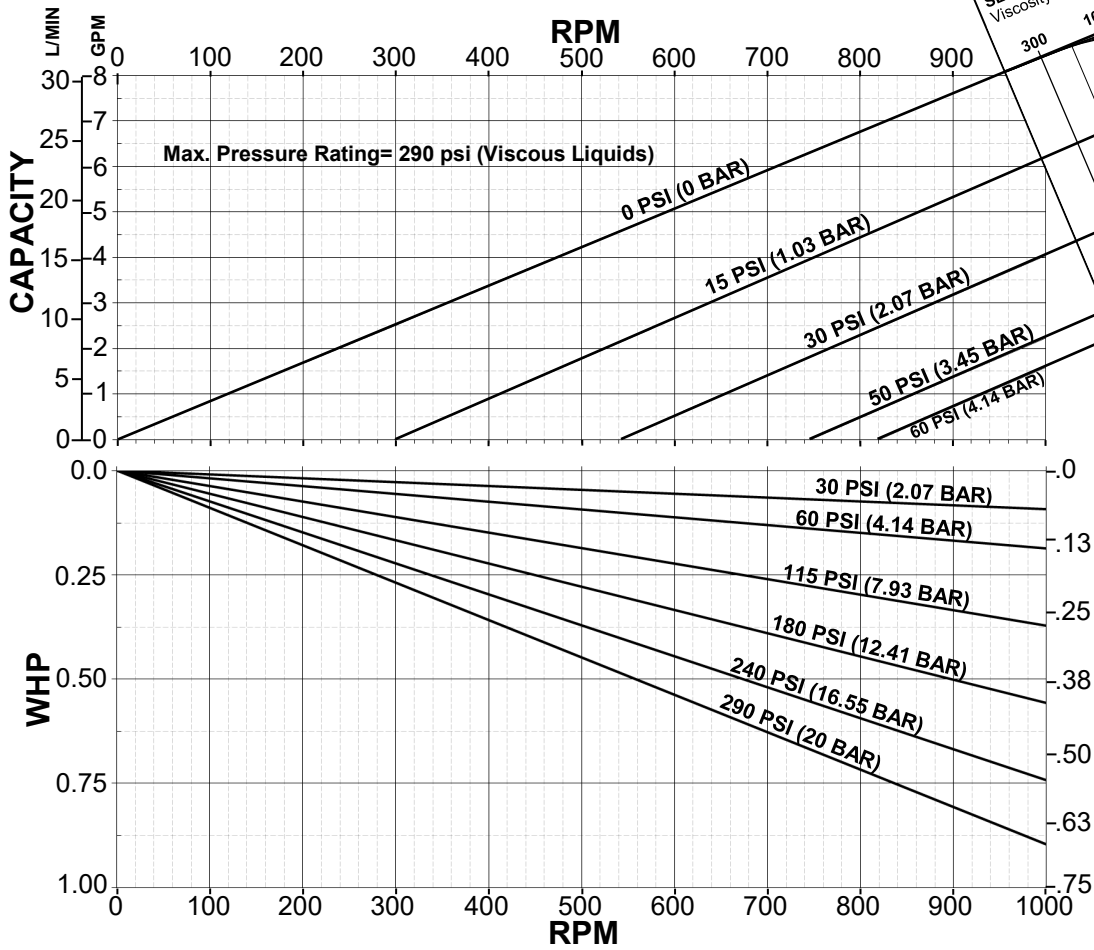

(English units) **Total Power (HP)** = $(.0007 \times p + .0051 \times v) \times n \times c$

(Metric units) **Total Power (Kw)** = $\frac{(2 \times p + v) \times n \times c}{1000}$

Where: p = pressure (psi or bar)
 v = viscosity correction factor (from graph)
 n = speed (RPM)
 c = displacement (G/rev. or L/rev from table below)

AL Series Model	10
C (G/rev)	.0085
C (L/rev)	.033

Ampco AL Series Model: AL10

Standard Clearances
 Standard Port Size = 1.0"
 Displacement =
 0.0085 Gal/Rev
 (0.033 L/Rev)

Operating Specifications:

- 0-1000 RPM Range
- 290 PSI (20 bar) Max. Pressure
- Temperature Range
 -40 °F (-40°C) to
 250 °F (121°C)

Subject to change without notice

Performance ratings are based on standard clearance rotors and single mechanical seals. Contact manufacturer for ratings of other seal and rotor configurations

Ampco Pumps Company

2045 West Mill Road
 Glendale, WI 53209 USA
 Phone: (800) 737-8671
 (414) 643-1852

Website:
www.ampcopumps.com