


Since its introduction the Ampco R Series has been performing in some of the toughest conditions world-wide. Commonly used in bilge, ballast, fire and wash-down applications, the R Series is capable of self-priming up to 25 feet / 7.6 meters. The R Series is ABS (American Bureau of Shipping) approved and meets U.S. Coast Guard Fire Pump requirements for passenger vessels.

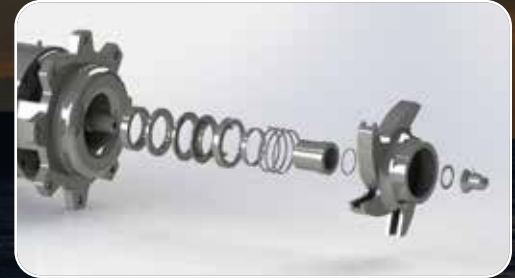

## R Series Self-Priming Centrifugal Pump

### Features

- Flow Rates – 10- 450 GPM / 2.27 – 102.2 m<sup>3</sup>/hr
- Available Alloys – nickel aluminum bronze, 316 stainless steel
- Can be mounted directly to Caterpillar 3500 marine diesel engines for cooling water
- Self-priming up to 25 ft/ 7.6 m
- ABS Approval
- 1 week delivery
- Made in the U.S.A.



### Additional characteristics

- Working pressure up to 175 psi, 12 BAR
- Temperatures up to 225°F, 105°C
- Multiple commercial seal options
- Enclosed impellers
- Close-coupled to NEMA or IEC motor

